

Precision Plumbing Products

"Specify with Confidence - Install with Pride"

SMART-PRIME ELECTRONIC TRAP PRIMING MANIFOLD

TEMPERATURE PRESSURE:

32°F - 125°F, 20 PSI - 150 PSI

MODEL NO:

SMP-500-24V (24 Volt)

1/2" NPT Male Inlet/1/2" NPT Female Outlet, hard wire connection required.

SMP-500-115V (115 Volt)


1/2" NPT Male Inlet/1/2" NPT Female Outlet, three prong connection provided

SMP-500-220V (220 Volt)

1/2" NPT Male Inlet/1/2" NPT Female Outlet, hard wire connection required.

The Trap Primer valve is recommended to be a minimum of 12" off the finished floor before a 90° elbow can be installed. The furthest distance of makeup line is approximately 20' to floor drain.

(Consult local code requirements)

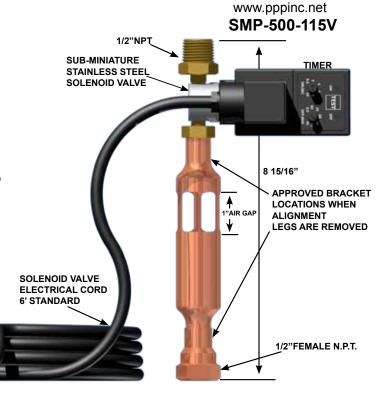

PROJECT SUBMITTAL

The 115V "Smart-Prime" has been designed to be a truly plug and play floor drain trap priming assembly. This electronic priming assembly will deliver 2 ozs. of potable water to four floor drain traps every 24 hours.

Water conservation was a very important aspect in the design of this product.

This priming assembly consists of:

A sub-miniature solenoid valve, an electronic timer, a physical air gap and a 6' electrical cord (three prong plug only provided with SMP-500-115V). By incorporating the Precision Plumbing Distribution Units this assembly is capable of priming up to four floor drain traps. Distribution Units sold separately.

WIRING MUST BE DONE IN ACCORDANCE WITH NATIONAL,

| Project: |
|-----------------|
| Contractor: |
| Engineer: |
| Date Submitted: |
| Prepared By: |

NOTE: For 220V and 24V options, the power supply cord will require a hard wire installation as it will not have an outlet connection.

ASSEMBLED IN ACCORDANCE WITH ANSI/ASME A112.1.2 AIR GAP IN PLUMBING SYSTEMS STANDARD

STATE, AND LOCAL ELECTRICAL CODES

Precision Plumbing Products



Division of JL Industries, Inc.

802 SE 199th Ave Portland, Oregon 97233

T (503) 256-4010 ||Iindustries, inc. F (503) 253-8165











www.pppinc.net